



HI-CONTACT™ LIQUID COLD PLATE


Aavid Hi-Contact™ tube liquid cold plates feature a high performance assembly utilizing a continuous tube press fit into an extruded aluminum plate. The patented geometry used in the Aavid Hi-Contact™ process moves the fluid closer to the device generating heat, achieving the best thermal performance from a tube cold plate.

To further increase the performance of Aavid's Hi-Contact™ liquid cold plates, a thermal epoxy is applied to the joint to provide a gap free thermal interface between the tube and the plate.

AVAILABLE OPTIONS

- Custom Sizes Available – See Below for Design Guidelines
- Tube Material: Stainless Steel, Cupronickel
- Finishes: AavSHIELD, AavSHIELD³

For standard sizes and part numbers visit www.aavid.com.

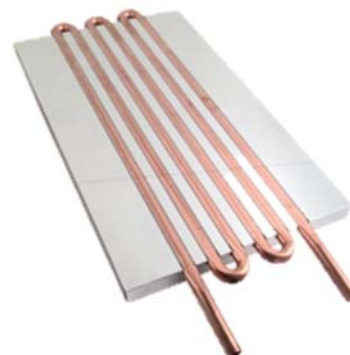

FEATURES & BENEFITS:

- Cost Effective
- High Performance Leak Free Joints
- Hi-Contact™ for Better Heat Transfer
- Easy to Customize

HI-CONTACT™ PRODUCT SPECIFICATIONS

Property	Details
Plate Details	Extruded Aluminum
Tube Material	Copper 9.5mm O.D. x 1.24mm wall
Standard Finish	Unfinished
Epoxy	Aluminum Filled - High Thermal Conductivity



DESIGN GUIDELINES

Dimensions are shown in mm

Figure 1 Detail A

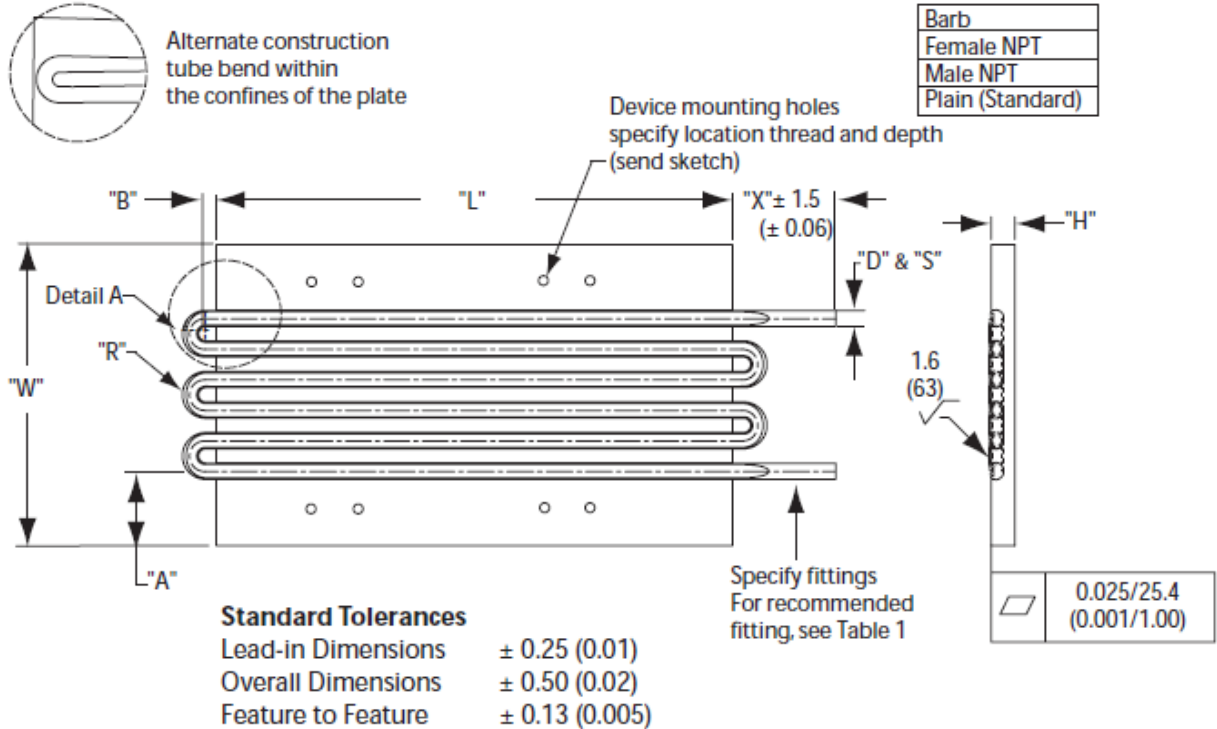


Table 1: Fittings

Barb
Female NPT
Male NPT
Plain (Standard)

Dim	Description	Min	Max
A	Tube to edge	6.4 (0.25)	
B	Center line of tube radius to plate	3.0 (0.12)	
H	Plate thickness	1.7 x Dim D	25.4 (1.00)
L	Plate length	25.4 (1.00)	1219.2 (48.00)
R	Tube bend radius measured at centerline (Copper only. For alternate materials please contact application engineering.)*	1 x Dim D	
S	Tube wall thickness	1.25 (0.050)	
D	Tubing diameter	6.4 (0.25)	25.4 (1.00)
W	Plate width	38.1 (1.50)	250.4 (10.00)
X	Tube extension	25.4 (1.00)	254.0 (10.00)

Aavid reserves the right to make changes to the products or information contained herein without notice. No liability is assumed as a result of their use or applications. For additional information, please contact Aavid directly.